



## ABOUT US

**Jiangshan Lofeal Plastic Technology Co., Ltd** is a specialized manufacturer and exporters in the field of Cable Ties. We have many years experiences in Cable Ties. Our Cable Tie approved by SGS(RoHS) & CE. Your total satisfaction is paramount to us. You will be very pleased with the cable ties you purchase from LOFEAL. All our cable ties products come with a 2 years manufacturer's warranty. Our cable ties not to be the cheapest, but high ratio of performance to price.

# LOFEAL

## Professional in Nylon Cable Ties

Not to be the cheapest  
But high ratio of performance to price




产品选型手册  
Product selection manual

# LOFEAL

江山路菲塑业科技有限公司  
Jiangshan Lofeal Plastic Technology Co., Ltd

- 📍 Add: NO12, Tongchang Road, Changtai Town, Jiangshan City, Zhejiang Province, China
- ☎ 0086-570-4990103
- 📞 0086 158 5700 3894 / 0086 152 1660 4872
- 🌐 www.lofeal.com
- ✉ steven@lofeal.com / amy@lofeal.com

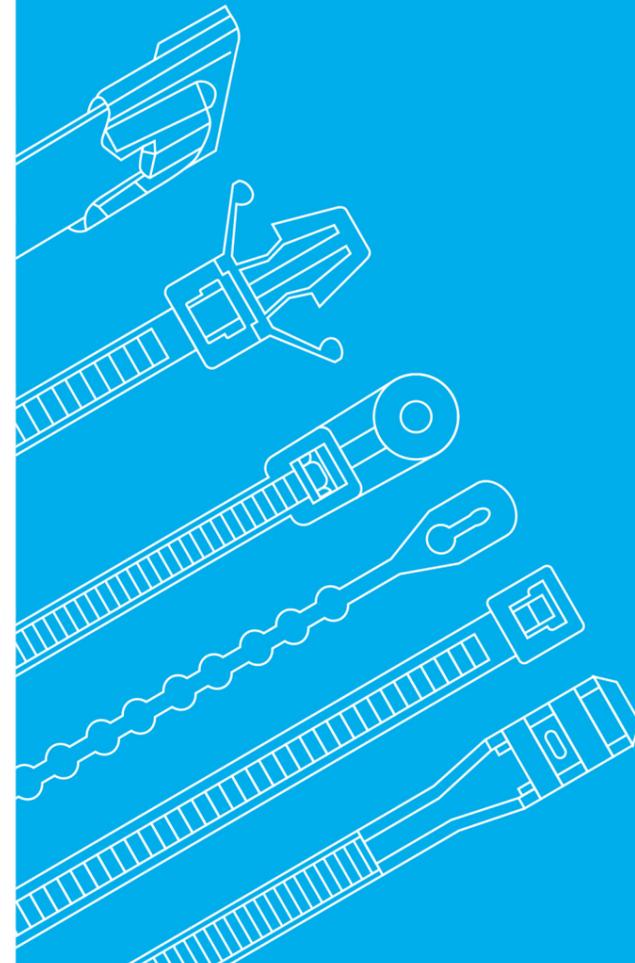

江山路菲塑业科技有限公司  
Jiangshan Lofeal Plastic Technology Co., Ltd



### 自锁式尼龙扎带 Self-locking Nylon Cable Ties

材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。

操作温度：-35℃ to 85℃

颜色：标准颜色为本色（白色），另有抗紫外线之黑色，特殊颜色欢迎订做。



Material: Nylon66, 94V-2 certificated by UL. Heat-resisting, erosion control, insulate well and not apt to age.

Working temperature: -35℃ to 85℃

Color: Natural(or white, standard color): UV black and other colors are available as requested.



编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LF-3×60	2 3/8"	60	2.5	2-11	18	8
LF-3×80	3 3/16"	80	2.5	2-16	18	8
LF-3×90	3 5/8"	90	2.5	2-18	18	8
LF-3×100	4"	100	2.5	2-22	18	8
LF-3×120	4 3/4"	120	2.5	2-30	18	8
LF-3×140	5 1/2"	140	2.5	2-33	18	8
LF-3×150	6"	150	2.5	2-35	18	8
LF-3×160	6 1/4"	160	2.5	2-40	18	8
LF-3×200	8"	200	2.5	2-50	18	8
LF-4×100	4"	100	2.5	3-22	40	18
LF-4×120	4 3/4"	120	3.5	3-30	40	18
LF-4×140	5 1/2"	140	3.5	3-33	40	18
LF-4×150	6"	150	3.5	3-35	40	18
LF-4×180	7"	180	3.5	3-42	40	18
LF-4×200	8"	200	3.5	3-50	40	18
LF-4×220	8 5/8"	220	3.5	3-58	40	18
LF-4×250	10"	250	3.5	3-65	40	18
LF-4×280	11"	280	3.5	3-70	40	18
LF-4×300	11 5/8"	300	3.5	3-80	40	18
LF-4×370	14 1/2"	370	3.5	3-102	40	18
LF-5×100	4"	100	4.6	3-22	50	22
LF-5×120	4 3/4"	120	4.6	3-24	50	22
LF-5×180	7"	180	4.6	3-42	50	22
LF-5×190	7 1/2"	190	4.6	3-46	50	22
LF-5×200	8"	200	4.6	3-50	50	22
LF-5×250	10"	250	4.6	3-65	50	22
LF-5×280	11"	280	4.6	3-70	50	22
LF-5×300	7 8/5"	300	4.6	3-82	50	22
LF-5×350	13 3/4"	350	4.6	3-60	50	22
LF-5×380	15"	380	4.6	3-102	50	22
LF-5×400	15 3/4"	400	4.6	3-105	50	22

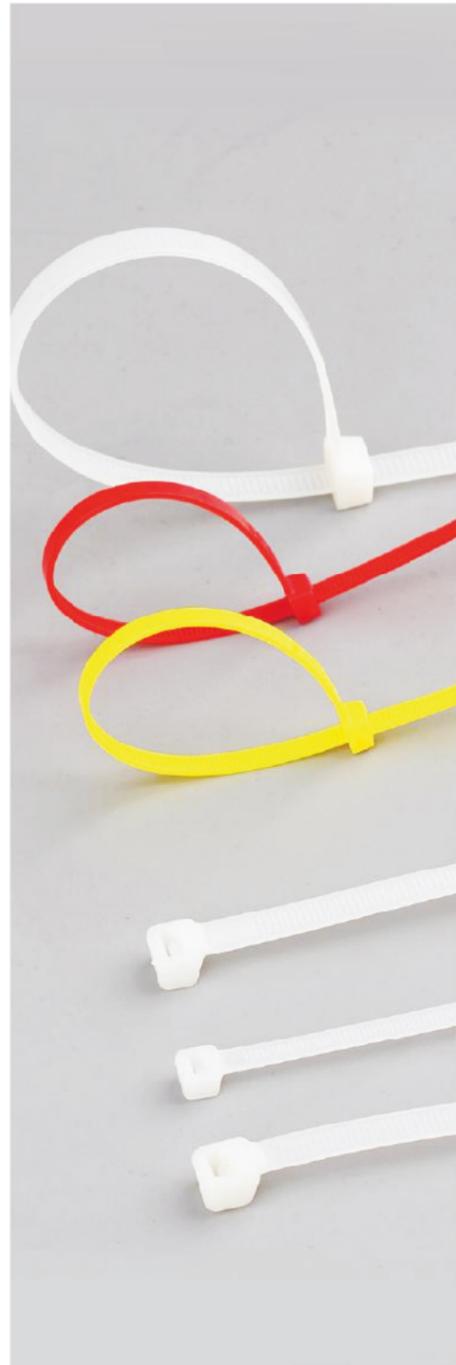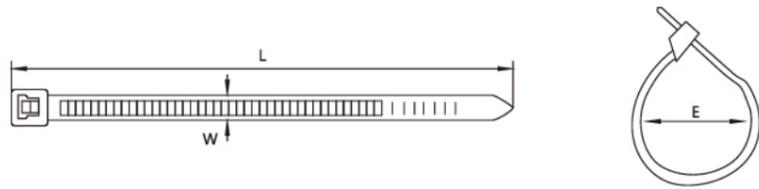

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH		标牌尺寸 STICKS SIZE
	INCH	mm			LBS	KGS	
LF-5×430	170"	430	4.6	3-110	50	22	
LF-5×450	17 3/4"	450	4.6	3-130	50	22	
LF-5×500	19 11/16"	500	4.6	3-150	60	22	
LF-8×150	6"	150	6.8	3-33	85	38	
LF-8×180	7"	180	6.8	3-42	85	38	
LF-8×200	8"	200	6.8	3-50	85	38	
LF-8×250	10"	250	7.5	4-63	85	55	
LF-8×270	10 5/8"	270	6.0	4-65	65	30	
LF-8×300	11 5/8"	300	7.5	4-82	120	55	
LF-8×350	13 3/4"	350	7.5	4-90	120	55	
LF-8×370	14 1/4"	370	7.5	4-98	120	55	
LF-8×400	15 3/4"	400	7.5	4-105	120	55	
LF-8×450	17 3/4"	450	7.5	4-118	120	55	
LF-8×500	19 11/16"	500	7.5	4-150	120	55	
LF-8×750	29 9/16"	750	7.5	4-220	120	55	
LF-10×400	15 3/4"	400	9.0	4-105	175	80	
LF-10×450	17 3/4"	450	9.0	4-118	175	80	
LF-10×500	19 11/16"	500	9.0	8-150	175	80	
LF-10×530	20 3/4"	530	9.0	8-155	175	80	
LF-10×550	21 1/16"	550	9.0	8-160	175	80	
LF-10×650	25 9/16"	650	9.0	8-190	175	80	
LF-10×700	27 1/2"	700	9.0	10-205	175	80	
LF-10×760	30"	760	9.0	10-225	175	80	
LF-10×920	36 1/4"	920	9.0	10-265	175	80	
LF-10×1020	40 1/6"	1020	9.0	10-295	175	80	
LF-10×1150	45 1/4"	1150	9.0	10-310	175	80	
LF-10×1210	47 3/4"	1210	9.0	10-340	175	80	
LF-10×1350	53"	1350	9.0	10-380	175	80	
LF-12×300	11 5/8"	300	12.7	12-82	250	114	
LF-12×400	15 3/4"	400	12.7	12-105	250	114	
LF-12×540	21 1/4"	540	12.7	14-155	250	114	
LF-12×650	25 9/16"	650	12.0	14-190	250	114	
LF-12×750	29 9/16"	750	12.0	10-220	250	114	
LF-12×760	35 1/2"	760	12.0	14-225	250	114	
LF-12×780	30 3/4"	780	12.7	14-230	250	114	


### 标牌式尼龙扎带 Marker Nylon Cable Ties

材质：采用UL认可NYLON66，防火等级94V-2，不易老化。  
特别：扎带前端设有白标牌，要用油性笔在上面标志记号

Material: Nylon 66, 94V-2 certified by UL, not easily aging.  
Feature: It is easy to mark on the space at front tip of ties with oil pen.




编号 ITEM.NO	L(长)		W(宽) (mm)	最大捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH		标牌尺寸 STICKS SIZE
	INCH	mm			LBS	KGS	
LFM-100	4"	100	2.5	3-22	18	8	24×12
LFM-150	6"	150	3.0	3-35	40	18	24×14
LFM-200	8"	200	3.2	3-50	40	18	24×15

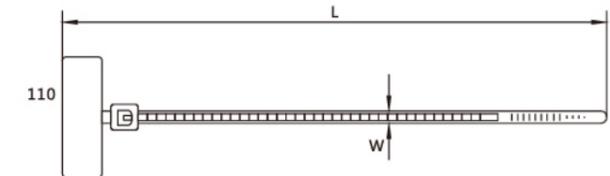


### 固定头式尼龙扎带 Mountable Head Cable Tie

材质：UL认可之尼龙66料制成  
特点：扎带捆扎电线后，将整束电线用螺钉固定在基板上。  
Material: Nylon 66 certified by UL.  
Usage: after bundling wires, fix them on plate with screw.

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LFMH-150	6"	150	3.6	3-35	40	18
LFMH-200	8"	200	4.8	3-50	50	22
LFMH-250	10"	250	4.8	3-65	50	22
LFMH-400	16"	400	4.8	3-105	50	22



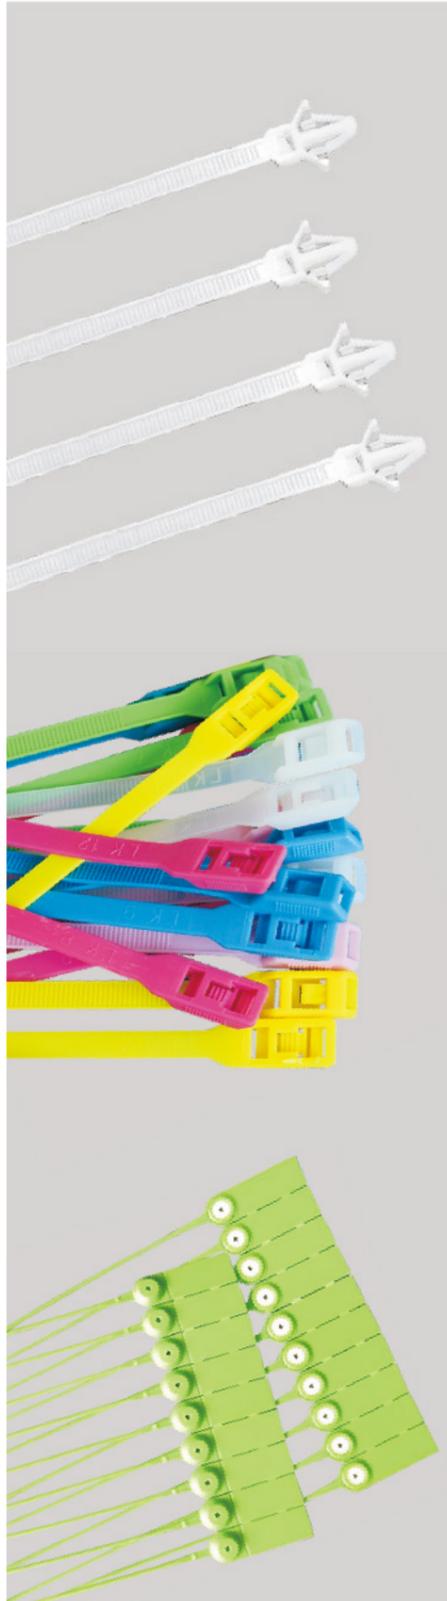

### 插销式扎线带 Push Mount Ties


材质: 采用UL认可尼龙66料制成, 防火等级94V-2, 耐酸, 耐蚀, 绝缘性良好、不易老化、承受力特强。

使用方法: 先将机板钻孔, 然后把扎带插入孔内, 再将电线扎紧即可。

Material: Nylon 66, 94V-2, agreed by UL. Acid and corrode resisting, insulate, not apt to age.

Usage: insert tie to the hole of table and tighten it.

编号 ITEM.NO	L(长)		W(宽) (mm)	最大捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH		孔径(Φ) HOLE DIA.		机板厚度 PANEL THICKNESS	
	INCH	mm			LBS	KGS	INGH	mm	INGH	mm
LFPM-100	1"	100	2.5	22	18	8.0	0.189	4.8	0.094	2.4
LFPM-120	4 3/4"	120	3.2	25	30	13.6	0.157	4.0	0.079	2.0
LFPM-160	6 1/4"	160	4.8	38	50	22.0	0.252	6.4	0.126	3.2
LFPM-190	7 1/2"	190	4.8	45	50	22.0	0.252	6.4	0.126	3.2

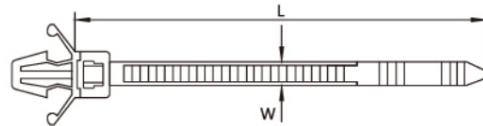

### 游乐场扎带 Nylon Cable Tie For Playground

材料: 采用UL认可尼龙66料制成, 防火等级94V-2, 耐酸、耐蚀、绝缘性良好、不易老化、承受力特强。

Material: Nylon 66, 94V-2, Agreed by UL. Acid and corrode resisting, insulate, not apt to age.

Application: For Playground

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LFP-8×300	12"	300	8.0	4-80	120	55
LFP-8×400	16"	400	8.0	4-105	120	55

### 塑料封条 Plastic seal cable tie

Material: PP

编号 ITEM.NO	L(长)		捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm		LBS	KGS
LFS-270	10.8"	270	3-68	34	15



### 可松式尼龙扎带 Releasable Nylon Cable Tie


材质: UL合格之NYLON66, 防火等级94V-2, 不易老化。

特点: 可再松开, 重复使用。

Material: Nylon 66 certificated by UL.

Feature: These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LFR-5×200	8"	200	4.6	3-50	40	18
LFR-8×100	4"	100	7.2	3-22	50	22
LFR-8×150	6"	150	7.2	3-35	50	22
LFR-8×200	8"	200	7.2	3-50	50	22
LFR-8×250	10"	250	7.2	4-65	50	22
LFR-8×300	12"	300	7.4	4-80	50	22
LFR-8×350	14"	350	7.4	4-90	50	22
LFR-8×400	16"	400	7.4	4-105	50	22
LFR-8×450	18"	450	7.4	4-110	50	22



### 双扣式尼龙扎带 Double Locking Nylon Cable Ties


材料: 采用UL认可尼龙66(黑色)料制成, 防火等级94V-2, 耐酸蚀, 不易老化。

特点: 双锁式设计、承受力特强。

Material: Nylon 66, 94V-2, certificated by UL. Acidcontrol and not easy to age.

Usage: Double locking, strong supporting capacity.

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LFD-9×180	7.2"	180	9.0	8-48	113	50
LFD-9×260	10.4"	260	9.0	8-70	113	50
LFD-9×360	14.4"	360	9.0	8-96	113	50



### 手铐扎带 Nylon Handcuff Cable Ties

材料: 采用UL认可尼龙66(黑色)料制成, 防火等级94V-2, 耐酸蚀, 不易老化。

特点: 承受力特强。


Material: Nylon 66, 94V-2, certificated by UL. Acidcontrol and not easy to age.

Usage: strong supporting capacity.

编号 ITEM.NO	L(长)		W(宽) (mm)	捆扎范围 BUNDLE DIAMETERE (mm)	拉力 TENSILE STRENGTH	
	INCH	mm			LBS	KGS
LFH-12×700	28"	700	12	14-90	600	266
LFH-13×890	36"	890	13	14-130	600	266

不锈钢扎带 Stainless steel cable tie

编号 ITEM.NO	L(长)	W(宽) (mm)	最大捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH		材质 STAINLESS STEELTYPE
				LBS	KGS	
LFSP-100	100	4.6	22	100	46	AISI.304
LFSP-152	152	4.6	35	100	46	
LFSP-200	200	4.6	50	100	46	
LFSP-300	300	4.6	80	100	46	
LFSP-360	360	4.6	95	100	46	
LFSP-520	520	4.6	150	100	46	
LFSP-680	680	4.6	195	100	46	
LFSP-840	840	4.6	250	100	46	
LFSP-1050	1050	4.6	285	100	46	
LFSP-152	152	7.9	35	145	145	
LFSP-200	200	7.9	50	145	145	
LFSP-300	300	7.9	80	145	145	
LFSP-350	360	7.9	95	145	145	
LFSP-520	520	7.9	150	145	145	
LFSP-680	680	7.9	195	145	145	
LFSP-840	840	7.9	250	145	145	
LFSP-1050	1050	7.9	285	145	145	

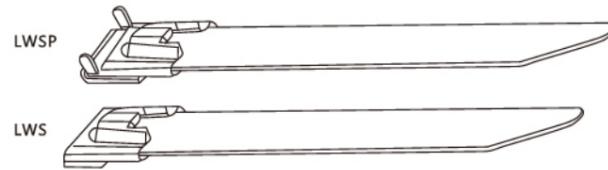

编号 ITEM.NO	L(长)	W(宽) (mm)	最大捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH		材质 STAINLESS STEELTYPE
				LBS	KGS	
LFS-100	100	4.6	22	100	46	AISI.304
LFS-152	152	4.6	35	100	46	
LFS-200	200	4.6	50	100	46	
LFS-300	300	4.6	80	100	46	
LFS-360	360	4.6	95	100	46	
LFS-520	520	4.6	150	100	46	
LFS-680	680	4.6	195	100	46	
LFS-840	840	4.6	250	100	46	
LFS-1050	1050	4.6	285	100	46	
LFS-152	152	7.9	35	145	145	
LFS-200	200	7.9	50	145	145	
LFS-300	300	7.9	80	145	145	
LFS-350	360	7.9	95	145	145	
LFS-520	520	7.9	150	145	145	
LFS-680	680	7.9	195	145	145	
LFS-840	840	7.9	250	145	145	
LFS-1050	1050	7.9	285	145	145	



扎带超值包装系列 Value pack series of cable ties

编号 ITEM.NO	LW-250		
DETAIL	2.5×100MM 4"	红色(Red)	50PCS
	2.5×100MM 4"	黄色(Yellow)	50PCS
	2.5×100MM 4"	蓝色(Blue)	50PCS
	2.5×100MM 4"	绿色(Green)	50PCS
	2.5×100MM 4"	黑色(Black)	50PCS
MEAS	46×24×44CM		
QTY	64SETS/CTN(32SETS/INNER BOX)		
G.W/N.W	10/8KG		
KEEVE	DIA: Φ5.5CM, HEIGHT: 21CM		

编号 ITEM.NO	LW-500		
DETAIL	2.5×100MM 4"	红色(Red)	100PCS
	2.5×120MM 4.7"	黄色(Yellow)	100PCS
	3.6×150MM 6"	蓝色(Blue)	150PCS
	2.5×200MM 8"	绿色(Green)	150PCS
MEAS	38×38×44CM		
QTY	50SETS/CTN(25SETS/INNER BOX)		
G.W/N.W	12/10KG		
KEEVE	DIA: Φ7CM, HEIGHT: 21CM		

编号 ITEM.NO	LW-800	
DETAIL	2.5×100MM 4"	200PCS
	2.5×120MM 4.7"	200PCS
	3.6×150MM 6"	150PCS
	3.6×180MM 7"	100PCS
	3.6×200MM 8"	80PCS
	4.8×250MM 10"	50PCS
MEAS	57×46×52CM	
G.W/N.W	11/10KG	

编号 ITEM.NO	LW-800	
DETAIL	2.5×100MM 4"	600PCS
	3.6×150MM 6"	150PCS
	4.8×120MM 4.7"	350PCS
	4.8×280MM 11"	50PCS
MEAS	57×38×25CM	
G.W/N.W	12/10KG	





### 自粘式定位片 Self-adhesive Type Locating Piece

材质: 采用UL认可之尼龙66制成, 防火等级94V-2, 背附进口双面海绵胶, 绝缘性能好, 耐久性, 不易老化。

使用方法: 将定位片背面双面胶揭开, 贴于机板固定, 稍许片刻, 再用扎带捆扎电线即可。


特点: 省时, 简便, 供面板不可以钻孔时使用。

Material: UL approved Nylon 66, 94V-2, with imported adhesive sticker Good insulation, long lasting and uneasy to age.

How to use: Remove the cover of the adhesive and stick the piece properly, then put in cable tie for using.

Application: Used where hole-drilling is not allowed. easy and time-saving.


编号 ITEM NO.	长×宽 L×W(mm)	高 H(mm)	带孔 T(mm)	螺丝孔 SCREWHOLE(mm)
LF-20	20×20	6.1	5.0	2.9
LF-25	25×25	7.5	6.2	3.5
LF-30	30×30	8.7	6.4	4.5
LF-40	40×40	6.4	10.8	-



### 膨胀管 Expand plugs

材料: 采用PE料制成  
颜色: 白、灰

Material: Made from PE  
Color: White, Grey

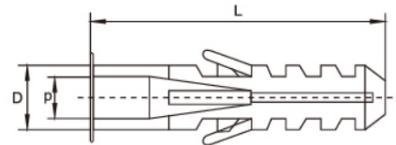

编号 ITEM NO.	长×宽 L×W(mm)	高 H(mm)	带孔 T(mm)	螺丝孔 SCREWHOLE(mm)
LF-Φ6	28.5	7.5	4	Φ4×32
LF-Φ8	31	10.5	5	Φ5×40
LF-Φ10	36	12	6	Φ5×45
LF-Φ12	41	14.5	7.5	Φ6×50



### 卷式结束保护带(缠绕管)Spiral Wrapping Band


材料: 采用PE料制成

用途: 作为保护电线不受磨损及绝缘用, 并可改进电线弯曲的美观。

Material: Made from PE.

Application: A protection wear for electricwires, and make them insulation and look nice.

编号 ITEM.NO.	内径(d) (mm)	外径(D) (mm)	螺距(W) (mm)	捆扎范围 WRAPPING RANGE (mm)	包装 PACKING
LF-Φ6	4	6	7.0	4-50	10M/ROLL
LF-Φ8	6	8	10.8	6-60	
LF-Φ10	7.5	10	11.4	7.5-60	
LF-Φ12	9	12	13.9	9-65	
LF-Φ16	13	16	15.0	12-75	
LF-Φ20	16	20	18.2	15-100	
LF-Φ25	21	25	19.6	20-130	

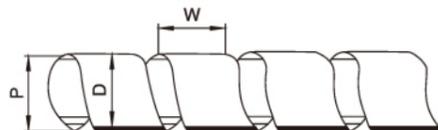

### 圆型钢钉线卡 Circle Cable Clips

材质: 采用PE或PP料制成, 附钢钉

使用方法: 将电线置于卡内, 用欠缺锤将钢钉钉于墙壁上即可将电线固定。


用途: 一般室内配线固定线缆用。

Material: PE, Steel nail

How to use: Put the cable under the clip and hammer the nail into wall to secure the cable.

Application: Securing of cables for general indoor wiring.

编号 ITEM NO.	高H (mm)	圆径R (mm)	钢钉 Nail(mm)	包装 PACKING
LF-4mm	5.3	4	1.7×15	100PCS & 1000PCS
LF-5mm	6.5	5	1.7×15	
LF-6mm	8.1	6	1.7×17	
LF-7mm	8.7	7	1.8×18	
LF-8mm	9.6	8	1.9×18	
LF-9mm	10.7	9	2.0×20	
LF-10mm	11.7	10	2.1×23	
LF-12mm	12.8	12	2.3×23	
LF-14mm	14.9	14	2.3×25	
LF-16mm	16.9	16	2.3×30	
LF-18mm	20.8	18	2.5×33	
LF-20mm	23.5	20	2.8×38	
LF-22mm	25.0	22	2.8×40	
LF-25mm	27.7	25	2.8×45	
LF-30mm	33	30	3×45	
LF-32mm	35	32	3.2×55	
LF-35mm	38	35	3.2×58	
LF-40mm	45	40	3.5×60	



### 方型钢钉线卡 Square Cable Clips

材质: 采用PP材料制成, 附钢钉

使用方法: 将电线置于卡内, 用欠缺锤将钢钉钉于墙壁即可将线缆固定

用途: 一般室内配线固定线缆用

Material: PP, Steel nail;

How to use: Put the cable under the clip and hammer the nail into wall to secure the cable.

Application: Securing of cables for general indoor wiring

编号 ITEM NO.	高H (mm)	半径		钢钉 Nail(mm)	包装 PACKING
		H(mm)	R(mm)		
LF-4mm	6.0	3.8	4	1.7×15	100PCS & 1000PCS
LF-5mm	6.0	3.8	5	1.7×15	
LF-6mm	6.5	4.1	6	1.7×16	
LF-7mm	7.0	4.7	7	1.9×18	
LF-8mm	7.5	5.0	8	2.05×20	
LF-9mm	8.2	5.4	9	2.05×23	
LF-10mm	8.6	5.7	10	2.3×23	
LF-12mm	9.0	6.1	12	2.3×23	
LF-14mm	11.2	6.5	14	2.4×30	

